

IL Series Infrared Laser Module



Part No: IL-8510-**XXX-XX-X**

XXX(Wavelength): 780, 808, 850, 980.


XX(Output Power): 1, 5, 10.....

X (Lens): G, P. (G-GLASS, P-PMMA)



Application:

- Measurement
- Bio-analytical
- Automation
- Alignment

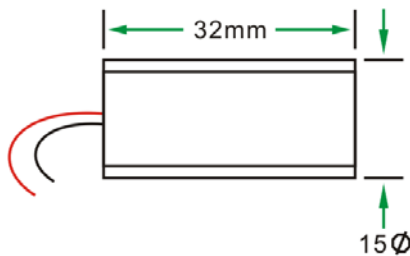

Specification:

Wavelength (λ) : 780nm, 808nm, 850nm, 980nm.

Operating Voltage (Vop) : DC5V.

Operating current (Iop) :

Optical Output Power : 1mW, 3mW, 5mW, 10mW .
(After Lens)

Focus Lens : PMMA (P), Glass (G).

Laser Pattern : Point

Laser Operation (Mode) : Continuous (CW).

Laser Structure : Single Mode Laser.

Power Stability : <1%.

Wavelength Drift : 0.2nm/°C.

Laser Class : IIIA Products.

Control Circuit : APC + Regulator.

Operating Temperature : -10°C ~+50°C.

Storage Temperature : -40°C ~+80°C.

Electrical Connections : +Red, -Black.

Cable : 22 cm.

Dimension : 12 mm(D) X 32 mm(L)

Housing Material : Copper + POM.

Operational Hazard-Semiconductor Laser Diode Module:

This laser module emits radiation that is visible and harmful to human eye. When in use, do not look directly into the laser emitting aperture. Direct viewing of laser diode emission at close range may cause eye damage.

Limited Warranty: One year. No warranty coverage for disassembly, modifications or damage due to abuse or misapplication.

E-Laser Enterprise Co., Ltd

No 398, Jinghe E. Rd., Beitun District, 406 Taichung City, Taiwan.

Tel: 886-4-2436-9426 Fax: 886-4-2436-5843

E-Mail: laser.ling@msa.hinet.net

<http://www.linelas.com.tw/>